



Wholesale Supplier

FETAL DOPPLER

A to Z Hospital Equipment and Surgical
Products **B to C**



9762 058 786



9762 058 786



info@savelifeindia.com



Sr. No. 29/1/2, Adarsh Nagar,
Uruli Devachi, Hadapsar, Pune
Network: PAN India



www.savelifeindia.com



FETAL DOPPLER



SLI-FD-001



SLI-FD-002



SLI-FD-003

Unique equipment for the early detection and diagnosis of pregnancies. It can meet the routine examination requirements of obstetricians, midwives and pregnant woman themselves. Extremely sensitive equipment is designed to be free from the external noise. Use of advanced technology ensures the reliability and long life of equipment. Rugged design makes it compact, portable, durable, convenient to use. Suitable for Routine monitoring of fetal health

- #Handy, Light weight and Easy to use
- #Accurate FHR detection with clear sound
- #Detection of fetal heart at 10 to 12 weeks

- #Built-in Speaker
- #High sensitivity interchangeable probe
- #Real time FHR detection

Accessories

- #Transducer probe with cable
- #Go!

- #Mains adaptor
- #Carrying case

MODEL	SLI-FD-001	SLI-FD-002	SLI-FD-003
Body	Shockproof, Plastic	Shockproof, Plastic	Shockproof, Plastic
Type	Handy, non-Digital	Table top, non-Digital	Table top, Digital
Display Type	NA	NA	Bright LED Display
Operation	Battery, Mains	Battery, Mains	Battery, Mains
Frequency	2 MHz	2 MHz	2 MHz
Battery	9 v	6 x 1.5 v D size	6 x 1.5 v D size
Alarms	NA	NA	Preset, High and Low (160 and 100bpm)
Weight	Less than 1 kg	Less than 2 kg	Less than 2 kg

HI-DOP VASCULAR DOPPLER (FDA&CE)



SLI-VD-04

SPECIFICATION		
Ultrasound Frequency	8MHz	Mono LCD
FHR Range	50~240bpm ± 2%	FHR Quality
Ultrasound Intensity	10mW/cm ² or less	Low Battery
FHR Resolution	1bpm	Full (Stable), Empty (HR Searching)
battery	1.5 V x 2, AA Type	280 Minit operating Time
Weight	190G	With Packing 800G





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Everything Under One Roof!

Certified Company

25

YEARS
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

FETAL DOPPLER

SLI-FD-005



SLI-FD-006



SPECIFICATION

LCD Display Size 45mm.x25mm Ultrasound probe

solid durable, anti-shock, anti-falling down

Ultrasound frequency: 2/2.5/3 MHz \pm 3% Measuring

Range-50-240 BPM | Humidity: 0-85% Ultrasound

intensity: <2.5Mw/cm'

Temperature: 5°C-40°C, Rechargeable Ni-H battery

(9V) Size-135mm X 95mm X 35mm

Weight-500gm. (Including Battery)

WIRELESS FETAL DOPPLER

PRODUCT SPECIFICATION

- Ultrasound Frequency: 283 MHz Continuous Wave
- Fetal Heart Rate Range: 50-240 bpm
- Fetal Heart Rate Accuracy: \pm 2% or 12bpm
- Transport/Storage temperature: -20 55 c
- Transport/Storage humidity: 10-93%, non-condensing
- Transport/Storage pressure: 50.0kPa 110.0kPa

SLI-WL-006



FEATURES

- Advanced auto-correlation fetal heart rate processing algorithm enables high accuracy.
- Dynamic digital noise reduction technology delivers best ever and Clearest sounds for optimum FHR detection.
- High resolution color screen provides numeric and trace presentation of fetal heart rate.
- High sensitivity wide beam 283MHz probe ensures optimum performance from early gestation right through to delivery.
- Rechargeable via USB socket guarantees low running costs and negates the need to change batteries.





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Everything Under One Roof!

Certified Company

25

YEARS
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

NST MACHINE

10.2" Display



TOUCH SCREEN

SLI-CMS-800G

7" Display



(FDA & CE)

BISTOS-BT-350

SLI-BT-350

MAIN FEATURES CMS-800G

- 8.4" color TFT LCD large Screen
- The world's advanced DSP technology Double event marks
- Three-in-one probe, reduce the line winding. Code- operation, easy and convenient
- 12 Hours Data & Waveform Storage and review Twins monitoring Function Option.
- Built in PC Network can be connected to the central monitoring system. (Optional)
-

TECHNICAL PARAMETERS

- sensitivity
- Ultrasound Intensity: <math><5\text{mW}/\text{cm}^2</math>
- Recorder: Thermal Printer
- Recorder Paper: Z-fold, thermal paper
- Printing width: 112 m.m.
- **Toco Rang:** 0-100 (relative unit)
- **Display:** FHR, TOCO, FM, Mark, Time, Freeze, Replay
- **Rower:** AC 220V, 50HZ

SPECIFICATIONS

- **Power Consumption:** 20W
- **Dimension:** 320 mm (L) X 260 mm (W) X 80 mm (H)
- **Net Weight:** 3.2 KG

MADE IN KOREA FDA & CE APPROVE MAIN FEATURES BT-350

- 7" wide TFT color LCD display
- Up to 150 patients data saving
- Fetal heart sound plays and record in PC
- Rotation screen
- Waterproof Probe
- GE/Philips Paper Compatible
- Interpretation Function
- Multiple language support
- Built-in quick guide (LCD Type) Waterproof probe
- Twins Probe Available

SPECIFICATIONS

- **Power Consumption:** <math><20\text{W}</math>
- **Dimension:** 96 mm (H) X 326 mm (L) X 276 mm (D)
- **Net Weight:** 5.5 KG
- **Working Temperature:** 10-40 C, Relative Humidity 10-80%
- **External Link:** RS-232C
- **Trend:** USB Data Saving
- **PC Interface (Central Monitoring System)**
- **Optional:** Rechargeable Battery





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Everything Under One Roof!

Certified Company

25 YEARS EXPERIENCE



GSTIN-27AFPPS3549Q1ZB




Specialist in Hospital Setup

WIRELESS FETAL MONITOR

SLI-WL-OX-500



10.1" Display

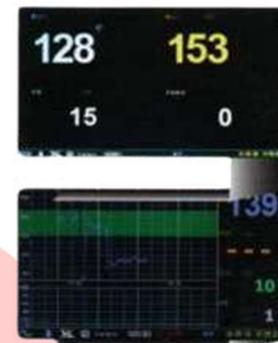

OXFORD OX-500 MAIN FEATURES CMS-800G

- Lightweight, space-saving, easy operations.
- Alarms for fetal tachycardia or bradycardia, low power and printing paper missing
- 10.1-inch TFT color screen with 1024 x 600 resolution and folding up to 90 degrees.
- 152 mm thermal printing paper.
- DSP technology I, real time identify and measurement for FHR, accurate and reliable results.
- The probe is built in FAS (fetal acoustic stimulator) and support water-proof and highly sensitive.
- It features an automatic grading function.
- It features a fetal movement displaying and printing function- print, manual and automatic fetal movement recording are available.
- 36 hours data storage which can be playback and printed.
- Special patient event and clinical marking button.
- It has a built-in 16.8V lithium battery applicable for both AC and DC.
- It supports both cable and wireless network connection and can be used with the central monitoring station to set up a network system.
- Apply voltage 100v-240V, 50Hz/60HZ.





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Everything Under One Roof!

Certified Company

25

YEARS EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup



FC1400

Antepartum Fetal Monitor for Twin Fetuses

7" Full Touch Screen Color TFT LCD





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Everything Under One Roof!

Certified Company

25
YEARS
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB

Specialist in Hospital Setup

SPECIFICATIONS

Dimensions	296(W) x 305.5(H) x 97.5(D) / (Approx. 2.9kg)
Display	7" TFT Wide LCD Screen(800 X 480)
Recorder	Method : Thermal Array Print Type : Roll type Print speed : 1,2,3cm/min(Real time) 30cm/min(Trace, 2,3cm/min) 20cm/min(Trace, 1cm/min) Paper feeding function
Power	Input : 100 - 240V ~, 1.5 - 0.7A, 50-60Hz, / Output : +18V = 2.8A
Battery (Option)	Li-ion : 4 hours (Charging) 2 hours (Discharging)
External link	LAN, WiFi, USB memory
Fetal Heart Rate	Input Signal : Ultrasound pulsed doppler Ultrasound frequency : 1.0MHz, 975KHZ Ultrasound power : <10mW/cm2 FHR detection method : Autocorrelation FHR range : 50 ~ 210 BPM FHR accuracy : ±1 BPM
Uterine Contraction	Input Source : External Transducer with load cell Reference Control : One touch switch, Auto zeroing Measurement range : 0 ~ 99
Fetal Movement Measurement	Detection source : Ultrasound pulsed doppler, event marker
Data Storage	Storage for 72 Hours
Auto CTG Analysis	Average Baseline FHR Number of UC Number of Acceleration Number of Deceleration Late Deceleration Early Deceleration Variable Deceleration High Episode Low Episode Short term variability Signal loss *CTG Analysis results is printed out every 10 minutes. (Intermediate Report)
Accessory (Standard)	Ultrasound doppler probe(2ea), UC probe(1ea), Event marker(1ea), Print paper(2rolls), Power adaptor&cord(each 1ea), Ultrasound gel(1ea), Probe belt(3ea), Operation manual(1ea)
Accessory (Option)	Rechargeable battery(1ea), Stimulator(1ea)



*Specifications subject to change without prior notice.

*You may have distortion or signal noise when you use nonstandard or other brand's accessories.

We strongly recommend you use only the authorized accessories which we supply.






• **Yellow/Green LED alarm**
Alarm lamp for easier recognition of device and patient status



• **Convenient USB function**
memory storage, WIFI converter

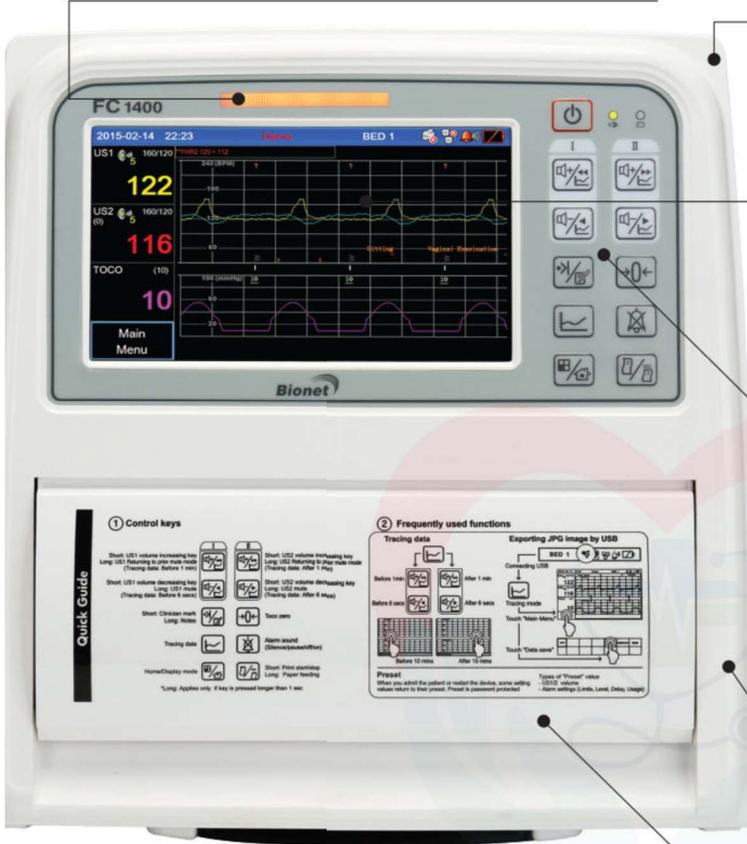

• **7" color TFT LCD(800X480)**
• **Touch screen operation**



• **10 smart keys for 17 functions**



• **More compact probe & robust connector**



• **Paper feeding for short handwriting memo**

• Multi Central Monitoring System

- Newly extended FC central monitoring system which is also independently working.

FC1400 (Delivery Room)



Up to 16 Devices



HIS Server

Nurse Station



FC Central (Server)

Doctor's Office



FC Central (Client)

Up to 10 Clients





2 Display Modes

- Graphic Mode: For general monitoring of fetal status
- Text Mode: For user's quicker & easier recognition of fetal status from long distance

• Graphic Mode

• Text Mode

CTG Interpretation Report

- For more comfortable and easier readings of findings by users.
- Up to 4 hours and 30 minutes data

EXIT	Patient	Trace	Alarm History	Print Start	Wave Print	Clinical mark
	Display	Network	Preset	Printer	System	Note
EXIT	NST Speed	Wave Speed	NST	CTG	Scale	Grid
Up	.3 cm/min	.N/A	.50Min	.On	.Intermitt	.Off
	Size	.B5				

Input Note from Note List

The note is shown in the status line of the display, and is annotated on the fetal trace. There are 13 default notes, and maximum 100 notes could be documented by users.