



Wholesale Supplier

O.T. PENDANT

A to Z Hospital Equipment and Surgical
Products **B to C**



9762 058 786



9762 058 786



info@savelifeindia.com



Sr. No. 29/1/2, Adarsh Nagar,
Uruli Devachi, Hadapsar, Pune
Network: PAN India



www.savelifeindia.com



Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LIFE

Certified Company

Everything Under One Roof!

25 YEARS EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

O.T. PENDANT

Product Specification:


- The activity range of Horizontal single arm radius 800mm, horizontal arm and functional box can be simultaneously rotated, each horizontal rotation angle 340°.
- Functional box vertical lifting stroke 300 mm. Motor power 100W.
- The gas terminal interface standard configuration:
 - oxygen 2pcs, Vacuum 2pcs; 2pcs Air4 bar
 - I. Different colors and shapes,
 - II. More than 20,000 times mating cycles;
 - III. using the secondary seal, with three states (on, off, pull) can carry air service;
- Instrument platform: two layers (height adjustable) (Size 470x370x50mm); rounded bumper design, each platform can load 20kg;
- Power supply: AC220V, 50HZ; AC110V, 60HZ
- Electrical outlet: 10 pcs (220V / 6/16A);
- Potential ground terminal: 2pcs;
- The network interface: RJ45 1pc;
- Telecom Interface Rj11, 1pc;
- Drawer: Size 310x310x125 mm 1pc;
- Weight loading: 150kg;
- Syringe pump rack 1pc, with 4 hook IV Stand
- The main material: high-strength aluminium alloy;
- The surface treatment using imported high- voltage electrostatic powder spray.





Product Specification:

- The activity range of Horizontal single arm radius 800mm, horizontal arm and functional box can be simultaneously rotated, each horizontal rotation angle 340°.
- The gas terminal interface standard configuration:
 - oxygen 2pcs, Vacuum 2pcs; 2pcs Air4 bar
 - I. Different colors and shapes,
 - II. More than 20,000 times mating cycles;
 - III. using the secondary seal, with three states (on, off, pull) can carry air service;
- Instrument platform: two layers (height adjustable) (Size 470x370x50mm); rounded bumper design, each platform can load 20kg;
- Power supply: AC220V, 50HZ; AC110V, 60HZ
- Electrical outlet: 10 pcs (220V / 6/16A);
- Potential ground terminal: 2pcs;
- The network interface: RJ45 1pc;
- Drawer: Size 310x310x125 mm 1pc;
- Weight loading: 150kg;
- Syringe pump rack 1pc, with 4 hook IV Stand
- The main material: high-strength aluminium alloy;
- The surface treatment using imported high- voltage hydrant electrostatic powder spray.

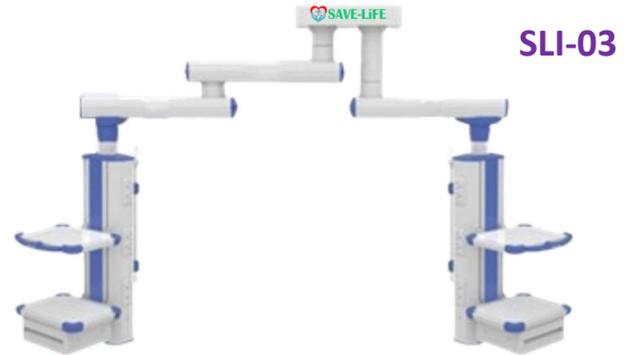

SLI-03



SLI-04



SLI-05



Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Certified Company

Everything Under One Roof!

25
YEARS
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

Technical Parameters:

- Working power: AC220V, 50Hz, AC110V, 60Hz
- Cross arm range of motion (radius): 700-1800mm
- Horizontal rotation angle: 0 ~ 340 °, the cross arm and the terminal box can be rotated horizontally or simultaneously.
- The net load weight is 150kg.
- Instrument platform: 3 layers (height adjustable)
optional Drawer size 350x350x125mm, Trey size 505x425x50mm rounded bumper design.

SLI-06

Standard Configuration:

- Gas interface configuration (2 oxygen, 2 vacuum, 2 compressed air):
- The interface color and shape are different, with anti-missing function;
- The number of insertions and removals is more than 20,000 times;
- Use secondary sealing, with three states (on, off, pull), with gas maintenance;
- Power socket: 10, 220V, 6/16A;
- Equipotential grounding terminal: 2;
- One stainless steel adjustable infusion rod holder with 4 hook IV stand.
- The main material is made of high-strength aluminum alloy profiles;
- The surface treatment is electrostatic spraying; ceiling-mounted installation, stable and firm.
- One storage item.





Manufacturer / Suppliers / Authorized Dealers & Importers

SAVE-LiFE

Certified Company

Everything Under One Roof!

25 YEARS EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

O.T. Pendant Floor Model

Standard Configuration:

- Functional box vertical lifting stroke 300mm.
- Motor power 100W.
- The gas terminal interface standard configuration (Outlets): vacuum 2pcs, oxygen 2 pcs, compressed air 2 pcs.
 - I. Different colors and shapes,
 - II. More than 20,000 times mating cycles.
 - III. Using the secondary seal, with three states (on, off, pull), can carry compressed air service.
- Instrument platform: two layers (height adjustable), rounded bumper design, each platform can load 20kg.
- Weight loading: 150kg.
- Power supply: AC220V, 50HZ; AC110V, 60HZ
- Electrical outlet: 10 pcs, 6 Amp+16 Amp Potential ground terminal: 2pcs.
- % The network interface: RJ45 1pc; telecom connector (Rj11 1 PC;)
- 6 Drawer Size: 470x370x50mm 1 pc.
- Syringe pump rack with 4 Hook IV Stand
- The main material: high-strength aluminium alloy.
- The surface treatment using imported high- voltage electrostatic powder spray.
- 4 Double caster Wheel (2 wheels Lockable)

SLI-07

