



**Wholesale Supplier**  
**OPERATION LED LIGHT ECONOMICAL**  
**QUALITY**

**A to Z Hospital Equipment and Surgical**  
**Products B to C**



9762 058 786



9762 058 786



[info@savelifeindia.com](mailto:info@savelifeindia.com)



Sr. No. 29/1/2, Adarsh Nagar,  
Uruli Devachi, Hadapsar, Pune  
Network: PAN India



[www.savelifeindia.com](http://www.savelifeindia.com)



Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

**25**  
YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



**Specialist in Hospital Setup**

## CONTENTS

### UNIQUE FEATURES

### LED SURGICAL LIGHTS

1

- Crystal Series
- Star Series
- Moon Series
- Pixel Series

2

6

9

11

### LED EXAMINATION LIGHTS

12

- Portable Series





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

25 YEARS EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## UNIQUE FEATURES



### Medical Grade LED

We use German medical grade LED in our each & every product. Its provides the highest CRI rating, which means in this type of LED you will be able to see true natural colour.



### Touch Controller

Touch control panel provides a user-friendly interaction and allows to control features of dome such as Intensity, Endo mode & ON /OFF.



### Single LED Replacement

In this type of system, we can replace or service each & every individual LED, which is very cost-effective.



### Branded Medical Grade LENS

We use Branded European Lenses which are highest in efficiency and Its efficiency remain constant in future.



### Aero Dynamic Design

Light Head design enables the ideal laminar airflow on the surgical site which minimizes contamination of bacteria.



### Seamless Dome

Dome is smooth & continuous, with no apparent Gaps or Spaces between one part & the next.





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## CRYSTAL

### SLI Crystal 6 Duo

#### Specification

Dome Diameter	650 mm
Lux Intensity (At 1 Meter)	200000 x 2 LUX
No. of LED	126 x 2 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	80 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Crystal 6

#### Specification

Dome Diameter	650 mm
Lux Intensity (At 1 Meter)	200000 LUX
No. of LED	126 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	80 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## CRYSTAL

### SLI Crystal 5 Duo

#### Specification

Dome Diameter	630 mm
Lux Intensity (At 1 Meter)	170000 x 2 LUX
No. of LED	105 x 2 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	60 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Crystal 5

#### Specification

Dome Diameter	630 mm
Lux Intensity (At 1 Meter)	170000 LUX
No. of LED	105 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	60 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB




Specialist in Hospital Setup

## CRYSTAL

### SLI Crystal 4 Duo

#### Specification

Dome Diameter	610 mm
Lux Intensity (At 1 Meter)	140000 x 2 LUX
No. of LED	84 x 2 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	50 x 2 Watt
Power Supply	220V / 50HZAC

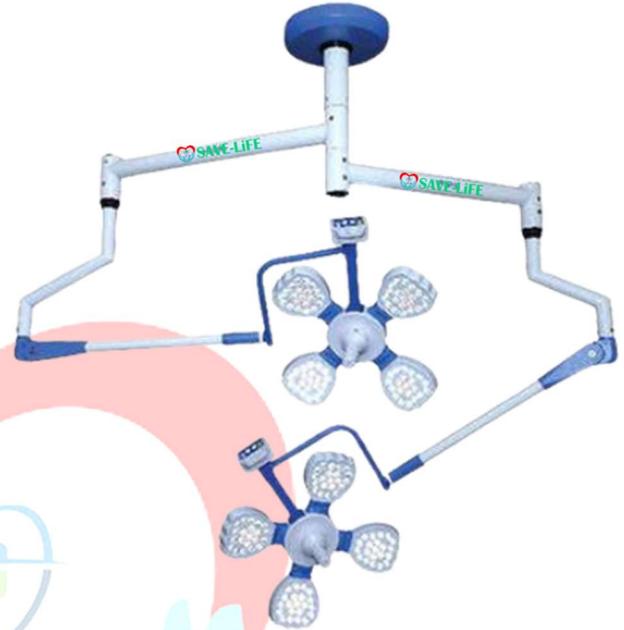

### SLI Crystal 4

#### Specification

Dome Diameter	610 mm
Lux Intensity (At 1 Meter)	140000 LUX
No. of LED	84 LED
Focus Diameter	150-300 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Focusing	Yes
Power Consumption	50 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB




Specialist in Hospital Setup

## STAR

### SLI Star 3 Duo

#### Specification

Dome Diameter	580 mm
Lux Intensity (At 1 Meter)	120000 x 2 LUX
No. of LED	63 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	40 x 2 Watt
Power Supply	220V / 50HZAC

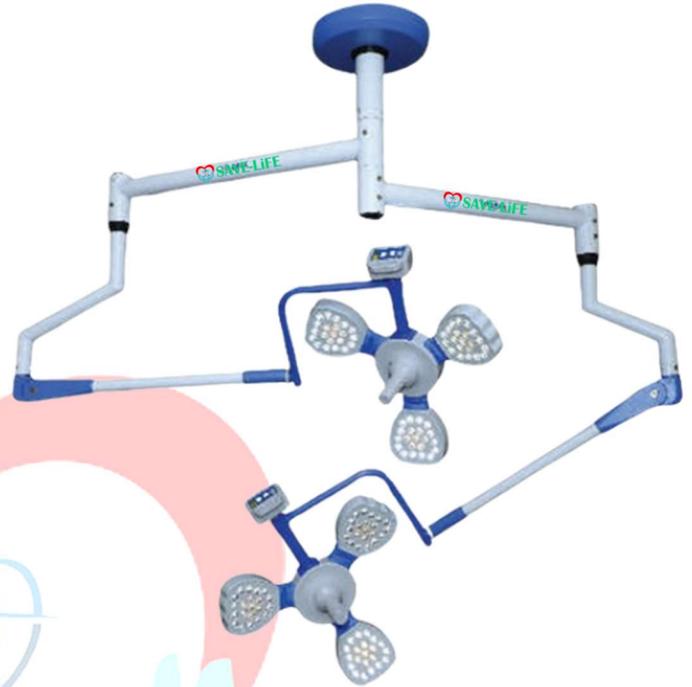

### SLI Star 3

#### Specification

Dome Diameter	580 mm
Lux Intensity (At 1 Meter)	120000 LUX
No. of LED	63 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	40 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB




Specialist in Hospital Setup

## STAR

### SLI Star 5 Duo

#### Specification

Dome Diameter	650 mm
Lux Intensity (At 1 Meter)	200000 x 2 LUX
No. of LED	45 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	100 x 2 Watt
Power Supply	220V / 50HZAC

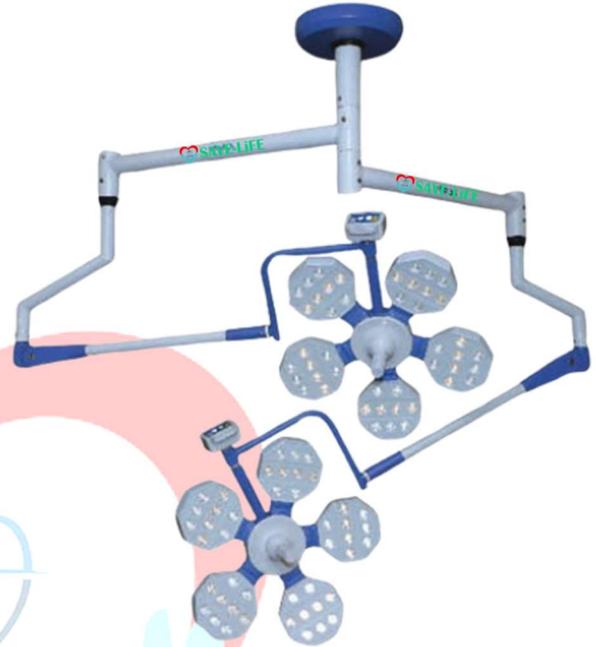

### SLI Star 5

#### Specification

Dome Diameter	650 mm
Lux Intensity (At 1 Meter)	200000 LUX
No. of LED	45 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	100 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB




Specialist in Hospital Setup

## STAR

### SLI Star 4 Duo

#### Specification

Dome Diameter	610 mm
Lux Intensity (At 1 Meter)	170000 x 2 LUX
No. of LED	36 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	80 x 2 Watt
Power Supply	220V / 50HZAC

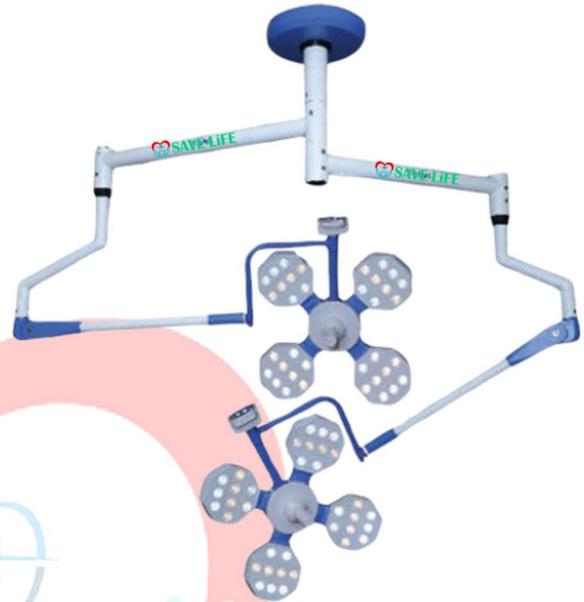

### SLI Star 4

#### Specification

Dome Diameter	610 mm
Lux Intensity (At 1 Meter)	170000 LUX
No. of LED	36 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	80 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LIFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## STAR

### SLI Star 3 Duo

#### Specification

Dome Diameter	580 mm
Lux Intensity (At 1 Meter)	140000 x 2 LUX
No. of LED	27 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Star 3

#### Specification

Dome Diameter	580 mm
Lux Intensity (At 1 Meter)	140000 LUX
No. of LED	27 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## MOON

### SLI Moon 28 Duo

#### Specification

Dome Diameter	500 mm
Lux Intensity (At 1 Meter)	140000 x 2 LUX
No. of LED	28 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Moon 28

#### Specification

Dome Diameter	500 mm
Lux Intensity (At 1 Meter)	140000 LUX
No. of LED	28 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## MOON

### SLI Moon 16 Duo

#### Specification

Dome Diameter	410 mm
Lux Intensity (At 1 Meter)	100000 x 2 LUX
No. of LED	28 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	40 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Moon 16

#### Specification

Dome Diameter	410 mm
Lux Intensity (At 1 Meter)	100000 LUX
No. of LED	28 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	40 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## CRYSTAL

### SLI Pixel 300 Duo

Specification	
Dome Diameter	575 mm
Lux Intensity (At 1 Meter)	130000 x 2 LUX
No. of LED	27 x 2 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 x 2 Watt
Power Supply	220V / 50HZAC



### SLI Pixel 300

Specification	
Dome Diameter	575 mm
Lux Intensity (At 1 Meter)	130000 LUX
No. of LED	27 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	96 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	60 Watt
Power Supply	220V / 50HZAC





Manufacturer / Suppliers / Authorized Dealers & Importers

# SAVE-LiFE

Everything Under One Roof!

Certified Company

# 25

YEARS  
EXPERIENCE



GSTIN-27AFPPS3549Q1ZB



Specialist in Hospital Setup

## CRYSTAL & STAR

### SLI Crystal 21

#### Specification

Dome Diameter	175 mm
Lux Intensity (At 1 Meter)	50000 x 2 LUX
No. of LED	21 LED
Focus Diameter	100-250 mm
Colour Rendering Index	94 RA
Colour Temperature	4500 Kelvin
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	5 Watt Per LED
Power Consumption	12 Watt
Power Supply	220V / 50HZAC

### SLI Star 9

#### Specification

Dome Diameter	200 mm
Lux Intensity (At 1 Meter)	60000 LUX
No. of LED	9 LED
Focus Diameter	100-250 mm
Focus Depth	10-15 cm
Colour Rendering Index	94 RA
Colour Temperature	3200 - 5500 K
Dimming Range	0-100% (Digital)
LED Life	60000 Working Hours
LED Wattage	3 Watt Per LED
Lens Size	36mm (HD Lens)
Focusing	Yes
Power Consumption	15 Watt
Power Supply	220V / 50HZAC

